


5000-PMU-FSR

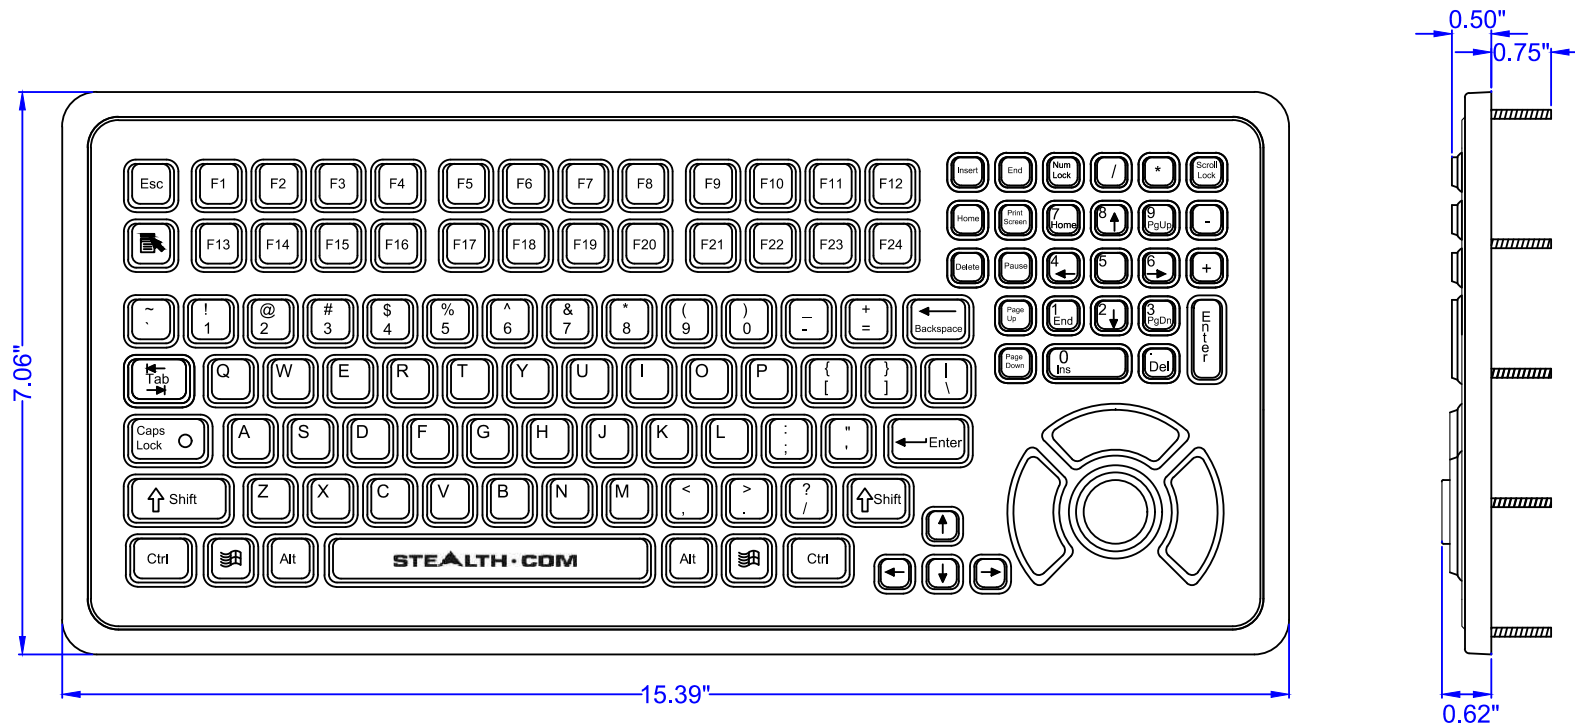

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 6.35 oz. +/- 1.06oz (180g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

PS2:
 KEYBOARD: 50mA@5V (from Keyboard port)
 POINTER: 35mA@5V (from Mouse port)
 USB: 85mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)
 OPERATING: -4°F to +140°F (-20°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours


SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

5000-PMU-FSR MOUNTING

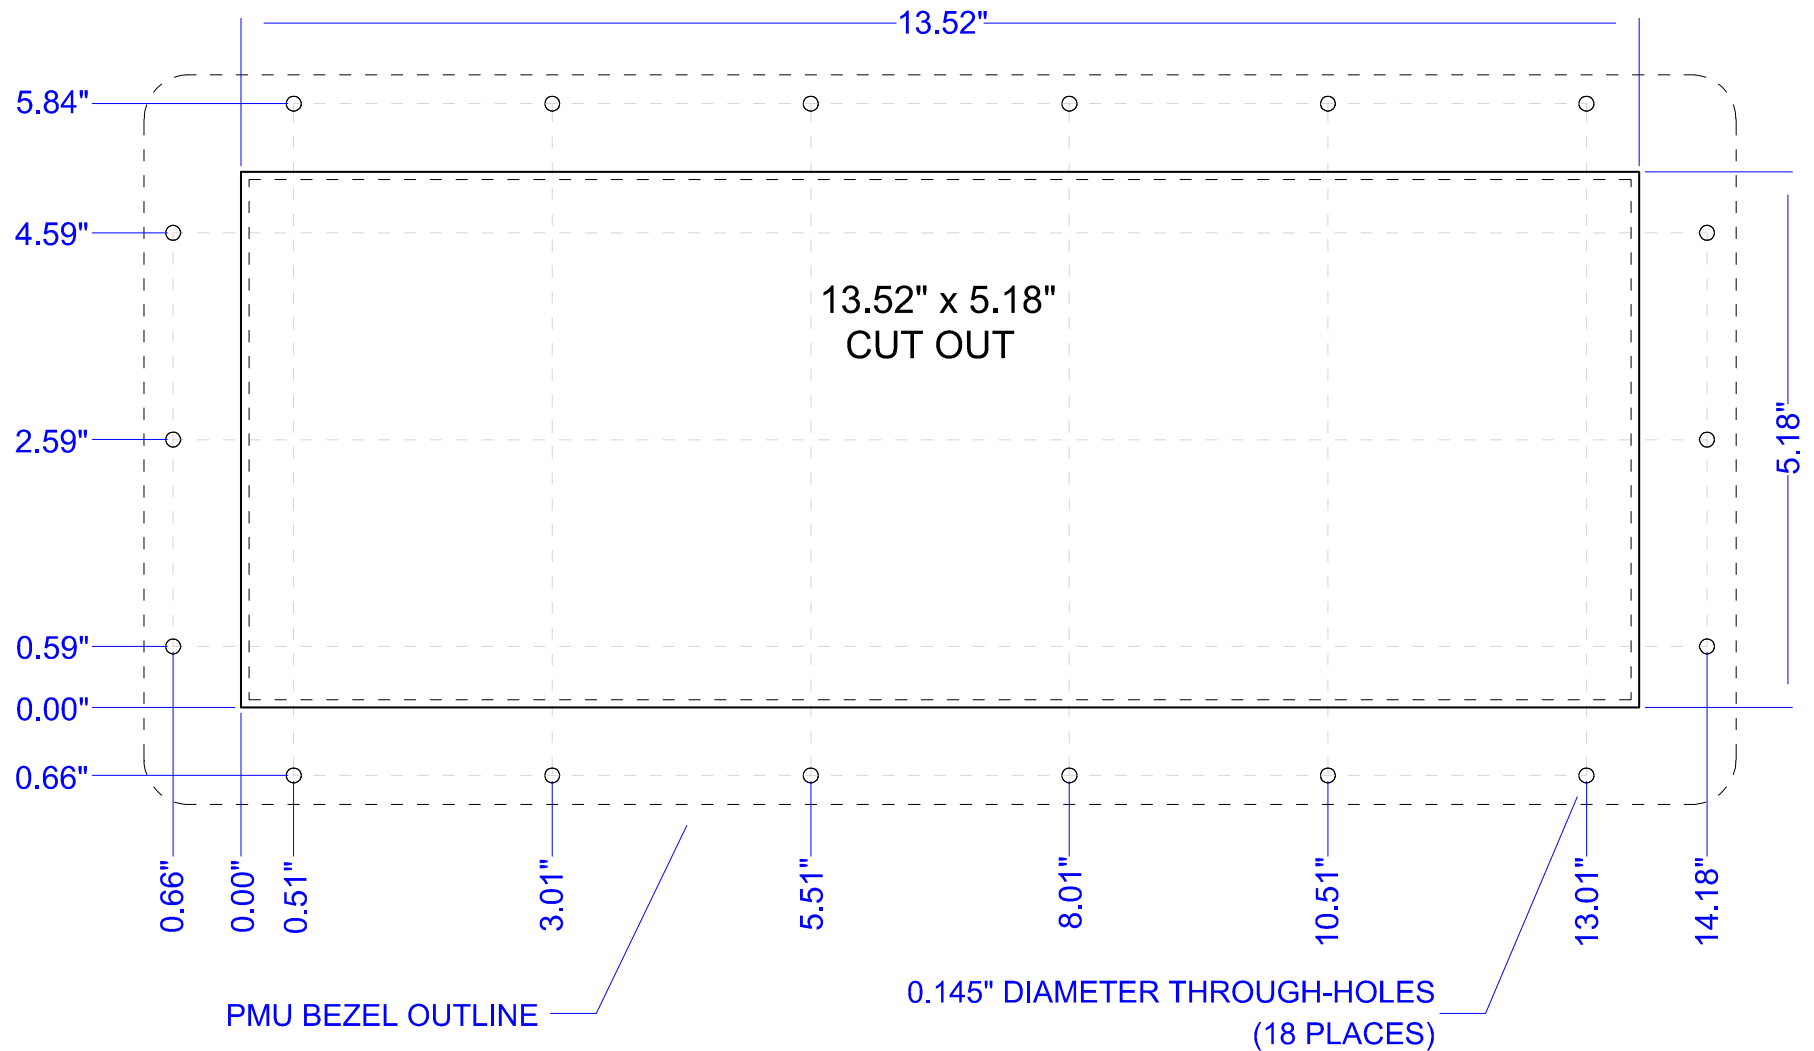

PMU BEZEL: ABS/Polycarbonate with 4-40 x 0.75" Metal Studs (18 Places)