

LPC-140G4 - ULTRA SMALL MINI PC WITH 4 GIGABIT LAN PORTS



\$1,045.00 USD

4-Gigabit Ethernet Ports in the palm of your hand!

- 4 Gigabit Ethernet LAN/WAN ports
- Ultra Small, Only 4.0" x 6.1" x 1.5" in size
 - Powerful Intel Mobile Processors
- 10-26 VDC Operation, Ideal for Mobile/Field
 - Up to 2TB Internal Storage
 - SSD (Solid State Drive) Optional
- Built-in GB LAN, USB 3.0/2.0, Audio, Serial, Video
 - Low Profile Rugged Aluminium Chassis
 - Panel/Wall Mount Brackets Included
- Windows 7, 10 Compatible, *other O/S Options Available


The LPC-140G4 model is now end of life with limited stock remaining. Please contact us for availability or replacement options.




GALLERY IMAGES



LPC-140G4 Front View

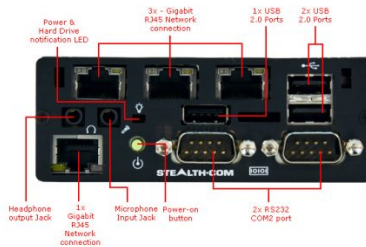

LPC-140G4 Rear View

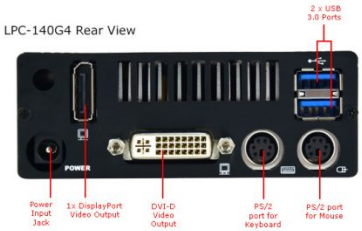

PRODUCT DESCRIPTION

The Stealth LPC-140G4 Multi-LAN Ultra Small Mini PC features a total of 4 GB Ethernet ports all in one tiny machine measuring (4.0" x 6.1" x 1.45") or just a little larger than a deck of playing cards.

The LPC-140G4 is a powerful, feature rich small-form PC that harnesses the power Intel's 4th generation i3 and Celeron mobile processors. Ideal applications include; security, VPN, network appliance, bandwidth controller, network diagnostics, IoT (Internet of Things), mini servers and more.

The LPC-140G4 operates from an external AC power adapter (included) or can be connected to an external 10-26 VDC source making it ideal for mobile and remote applications.

Stealth's LittlePCs are small form factor mini PCs designed to fit in space-confined areas and are ideal for demanding applications within the Industrial, Commercial, Scientific Research, Military, Public Safety, Utility, Transportation, mining and Telecommunications markets.

ADDITIONAL INFORMATION

Processor	Supporting Intel® 4th Generation Core™ i3 Processor 4010U or Intel® Celeron Dual-Core 2980U (standard)
Chipset	8-series chipset integrated in CPU
BIOS	Insyde UEFI BIOS
Memory	Offers 2 x DDR3 SO-Dimm memory slots providing options up to 16GB of RAM
Internal Storage	Offered with 500GB Serial ATA (SATA) with options of up to 2TB capacity Optional Solid State Disk Drive (SSD) mSATA drive support via 1 Internal Mini-PCIe
Internal Expansion Option	1 Internal Mini-PCIe expansion option PCIe and USB devices supported
Video	Onboard/Integrated Intel HD Graphics (built into the CPU) Dual Display support (clone or extended desktop)
Networking	3x Integrated 10/100/1000 Base-T Intel (i210-AT) Gigabit Ethernet controller, RJ45 connection (PXE support) 1x Integrated 10/100/1000 Base-T Intel (i218LM) Gigabit Ethernet controller, RJ45 connection (PXE support) Optional Built in 802.11 ac/a/b/g/n Wireless Networking Card, Dual Band Support, 2.4Ghz / 5Ghz + Bluetooth via Mini-PCIe, Intel AC 7260
Audio	Integrated Realtek High Definition Audio CODEC ALC892
Operating Systems	Windows 10 (64-bit) Windows 7 (32 and 64-bit) Windows Server 2012 R2 Ubuntu Linux Optional: QNX & embedded Please contact us directly for any special requirements
Chassis Description	Low Profile Rugged Aluminum Chassis Includes Panel/Wall Mount Brackets Input is 10V - 26VDC
Power Input	Rear 12VDC power Jack ideal for mobile applications Includes External AC Adapter, Input 100~240V AC @ 1.5A 50-60Hz

Power Management	ACPI compliant and Operating System direct power management Wake-on event
Hardware Monitor	Processor temperature Cooling fan speed Voltage 100-240V AC Adapter
Included with System	North American Power Cord 4 Rubber Feet Wall Mount Bracket
Options	802.11 b/g/n/ac Dual Band (2.4Ghz / 5Ghz) WiFi and Bluetooth, Intel® AC7260 via internal Mini-PCIe Remote power option Ideal for OEM or Cabinet manufacturers Solid State Drives (SSD) SATA DisplayPort to VGA cable Custom Mounting Bracket Removable Computer Module on LCD Monitor 2 PS/2 ports for Keyboard & Mouse 2 x USB 3.0 Ports
Rear Panel	1x DVI-D video connector 1x DisplayPort video connector DC Power Input Jack 4 x 10/100/1000 RJ45 Network connections 3 x USB 2.0 Ports 2 x RS232 COM port
Front Panel	Headphone/Audio Line-Out Jack Microphone Input Jack Power and Hard Drive notification LED Power-on button
Dimensions	4.0"(W) x 6.1"(D) x 1.5"(H) (102mm x 155mm x 37.8mm) Operating Temperature: 0 - 40C (32 to 104 F)
Environmental	Storage Temperature: -20~60C (-4~140F) Operating Relative Humidity (non condensing) 10-80% Storage Relative Humidity (non condensing) 0-90%
Weight	Power supply Weight: 1.35 lbs / 0.62 KG Unit Weight: 1.3 lbs / 0.58 KG (Depending on configuration) Shipping Weight: 4 Lbs / 1.8 KG (Depending on configuration)
Warranty	1 Year limited Warranty Standard 1 Year Extended Warranty available (see Configurator/Price List)
Disclaimer	Note: Specifications are subject to change without notice.